



FW Panel


Product Data

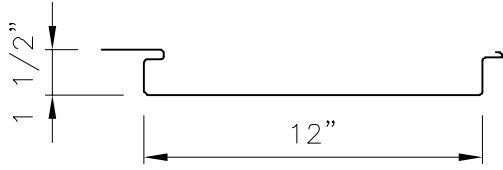

FLAT PROFILE

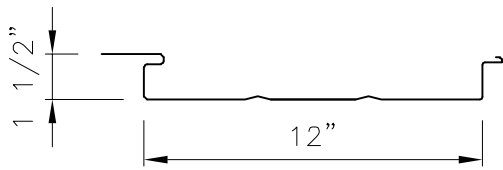

VEE GROOVES PROFILE

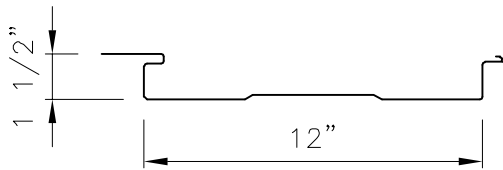

INVERTED PLANK PROFILE

Applications

Tongue-and-groove interlock panel used on vertical applications on fascias. Can be used as a soffit.

Substrates

Plywood, Hat Channels, Subgirts, Purlins

Material

Standard - 24 GA. ASTM A792 (50 ksi)

Optional - 22 GA. ASTM A792 (50 ksi)

Finishes

Acrylic Coated Galvalume®

Fluoropolymer (Kynar 500® PVDF resin-based)

Pan Conditions

Flat, Vee Grooves, and Inverted Plank. Also available with Reveal.

(Oil canning is inherent in all metal panels and is not cause for panel rejection. A signed oil canning acknowledgement will be required for all orders prior to production.)

Manufacturing

Roll formed in factory.


2'-0" min. / 8'-0" max. length for 24 GA.

2'-0" min. / 15'-0" max. length for 22 GA.

Testing/Agency Approvals *

FW 1 5/8" or 2 5/8" Reveal: ASTM E1592

Testing and Approvals are product specific. Please inquire for details.

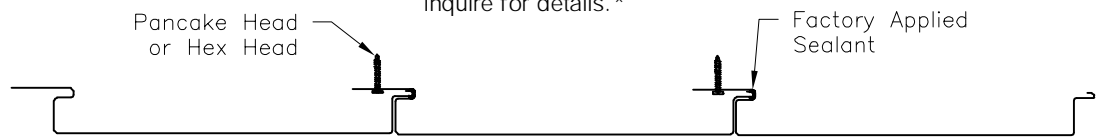

TYPICAL SEAM ENGAGEMENT

*Pancake Head or Hex Head Fasteners
(Fastener Type As Required)*


NOTE:

All data represented on this sheet may not be applicable to all widths and gauges. Please contact McElroy Metal for more information.



TYPICAL 1" REVEAL SEAM ENGAGEMENT

*Pancake Head Fasteners
(Fastener Type As Required)*

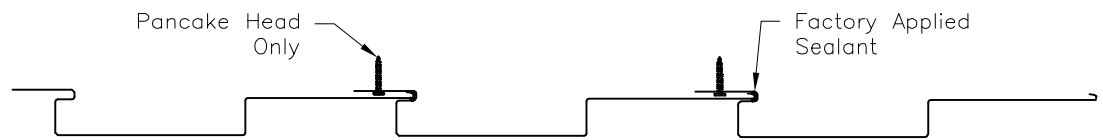

CUSTOM REVEAL SEAM ENGAGEMENT

*Pancake Head Fasteners
(Fastener Type As Required)*

Minimum Reveal is 1/2".
Maximum Reveal is 3"
Reveal can be increased in 1/2" increments.