


Mini-Rib Panel

Product Data

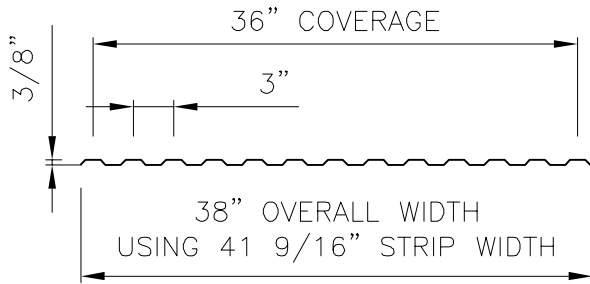

MINI-RIB PROFILE

Applications

Exposed fastener wall panel. Not recommended for roof applications. Standard panel lengths up to 40'. Please inquire for longer lengths.

Substrates

Plywood or Girts.

Material

Standard - 26 GA. ASTM A792 (50 ksi steel) AZ55 - Bare
AZ50 - Painted

Optional - 24 GA. ASTM A792 (50 ksi steel) AZ55 - Bare
AZ50 - Painted

- 29GA. ASTM A792 (80 ksi steel) AZ55 - Bare
AZ50 - Painted

Manufacturing

Roll formed in factory. (Bossier plant only)

Finishes


Acrylic Coated Galvalume®
Fluoropolymer (Kynar 500® PVDF resin-based)
Siliconized Polyester and Polyester

Pan Conditions


Oil canning is inherent in all metal panels and is not cause for panel rejection.

NOTE:

All data represented on this sheet may not be applicable to all widths and gauges. Please contact McElroy Metal for more information.

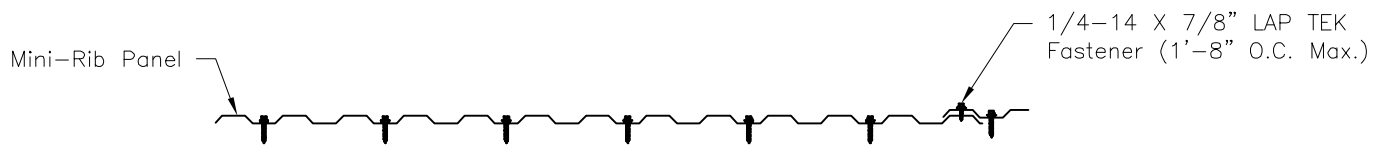

FASTENER PATTERN
(@ Eaves, Ridges & Endlaps)

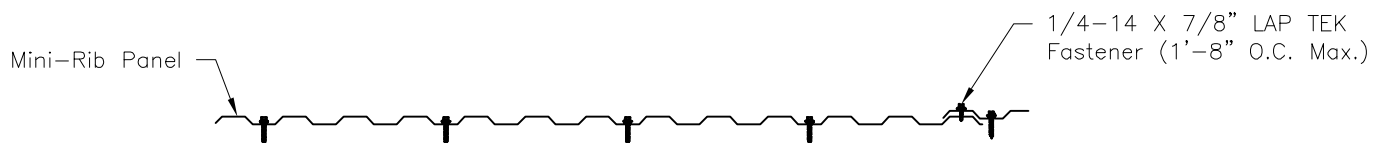

FASTENER PATTERN
(@ Intermediate Purlins)