


Mesa Panel

Product Data

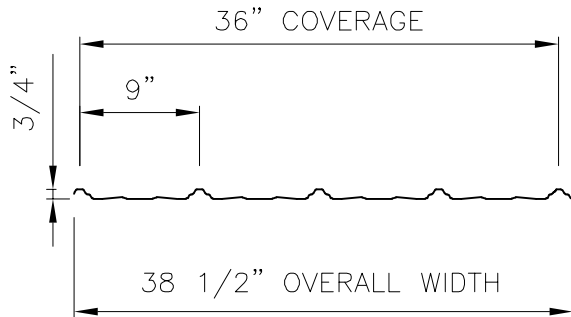

MESA PANEL PROFILE

Applications

Exposed fastener wall/roof panel used on slopes down to 1:12. Tape sealant is required in seam (side-laps) on slopes 3:12 to 1:12. Standard panel lengths up to 40'. Please inquire for longer lengths.

Substrates

Plywood or Purlins.

Material

- Standard - 29 GA ASTM A792 (80 ksi steel) AZ55 - Bare
AZ50 - Painted
- Optional - 24 GA. ASTM A792 (50 ksi steel) AZ55 - Bare
AZ50 - Painted
- 26 GA. ASTM A792 (50 ksi steel) AZ55 - Bare
AZ50 - Painted

Manufacturing

Roll formed in factory.

Finishes

Acrylic Coated Galvalume®
Fluoropolymer (Kynar 500® PVDF resin-based)

Pan Conditions

Oil canning is inherent in all metal panels and is not cause for panel rejection.

Testing*


Uplift: UL 580 Class 90
Impact Resistance: UL 2218 Class 4

NOTE:

All data represented on this sheet may not be applicable to all widths and gauges. Please contact McElroy Metal for more information.



FOAM INSIDE CLOSURE



FOAM OUTSIDE CLOSURE

